

UNCLASSIFIED

AD 266 305

*Reproduced
by the*

**ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA**



Best Available Copy

UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

STA 266305

266 305

112

TMR 190

DESIGN STUDY ON AN ALTERNATE METHOD FOR
PRODUCTION OF AMMONIUM PERCHLORATE (U)

17 July 1961

62 1-5

ASTIA

NO. 21 5000



U. S. NAVAL PROPELLANT PLANT,

INDIAN HEAD, MARYLAND

TMR 190

17 July 1961

DESIGN STUDY ON AN ALTERNATE METHOD FOR
PRODUCTION OF AMMONIUM PERCHLORATE (U)

by

J. E. Dodgen

U. S. NAVAL PROPELLANT PLANT
Indian Head, Maryland

O. A. WESCHE
Captain, USNavy
Commanding Officer

J. E. DODGEN
Commander, USNR
Technical Director

FOREWORD

The study presented here was completed in mid-1958. Therefore, the price information is somewhat out of date, but a quick review of current information indicates that changes in cost of ingredients and byproducts are favorable to the proposed process.

J. E. Dodgen
Technical Director

Released by:

O. A. WESCHE
Captain, USNavy
Commanding Officer

CONTENTS

<u>Heading:</u>	<u>Page no.</u>
Foreword _____	iii
Abstract _____	vi
Proposed Alternate Process _____	1
Advantages _____	7
Manufacturing Costs _____	8
Target Price _____	10
Reference _____	11

FIGURE

1. Flow Chart for the Production of Ammonium Perchlorate (10 T/Day) _____	3
--	---

TMR 190

ABSTRACT

Preparation of ammonium perchlorate by double decomposition of ammonium sulfate and sodium perchlorate was used to determine a target price for economic production.

DESIGN STUDY ON AN ALTERNATE METHOD FOR PRODUCTION OF AMMONIUM PERCHLORATE

The increased importance of ammonium perchlorate as a component of missile propellants makes it advisable to review the techniques of manufacture not only to establish alternate sources but also to establish a reasonable economic target price. This report includes a design study and cost estimates for preparation of ammonium perchlorate by a double decomposition reaction between sodium perchlorate and ammonium sulfate. The electrolytic process for production of sodium perchlorate from sodium chlorate offers little opportunity for improvement.

In the most widely used commercial process, sodium perchlorate is reacted with ammonia and hydrochloric acid and the ammonium perchlorate and sodium chloride are then removed by fractional crystallization. This process has several disadvantages:

- (1) The hot chloride solution in the presence of oxidizers causes excessive stress corrosion cracking and general corrosion of the process vessels;
- (2) Problems in metering the hydrochloric acid and ammonia make it difficult to maintain optimum pH;
- (3) Variation in pH makes it necessary to recycle as much as 20% to 40% of the product before it will meet specifications.

The ammonium perchlorate produced in this type of operation costs from \$0.34 to \$0.40 per pound.

PROPOSED ALTERNATE PROCESS

The double decomposition reaction between ammonium sulfate and sodium perchlorate was selected for study because of the widespread availability of ammonium sulfate. Furthermore, information is available on the equilibria of solutions resulting from this reaction. Freeth⁽¹⁾ showed ammonium perchlorate and sodium sulfate can be prepared by reacting equivalent weights of sodium perchlorate and ammonium sulfate in a mother liquor consisting of either.

Sodium sulfate can then be recrystallized from the hot and ammonium perchlorate from the cold remainder.

Equipment required includes a sodium perchlorate-ammonium sulfate dissolver, sodium sulfate vacuum crystallizer, and ammonium perchlorate cooling crystallizer. Solids feeders for the dissolver and a centrifuge and dryer for each crystallizer are also required. Figure 1 is a flow chart for a 10-ton-per-day ammonium perchlorate plant showing equipment, flow rates, and compositions. This design can be scaled directly.


Ammonium sulfate and sodium perchlorate are added to the dissolver which is maintained at 65° C to ensure solution of the reactants in the recycled mother liquor. The effluent passes to the sodium sulfate crystallizer. By application of heat and constant vacuum, process water is removed and the sodium sulfate is crystallized. Sodium sulfate is then removed in a slurry from the suspension container of the crystallizer, dewatered, washed, and dried. The effluent at 60° C passes to the ammonium perchlorate crystallizer. After the solution has been cooled to 25° C, ammonium perchlorate is selectively crystallized. The product is then dewatered, washed, and dried. Mother liquor from the ammonium perchlorate crystallizer is returned to the dissolver for reuse.

Material Balance

Based on a closed-cycle continuous process, the following liquor concentrations were selected:

	Dissolver effluent (%)	Sodium sulfate crystallizer effluent (%)	Ammonium perchlorate crystallizer effluent (%)
Na_2SO_4	23.4	18.4	20.6
NH_4ClO_4	15.1	16.1	6.0
$(\text{NH}_4)_2\text{SO}_4$	10.0	10.7	12.0
H_2O	51.5	54.8	61.4

The material balance is based on the following equation:



$$\begin{aligned} \text{NH}_4\text{ClO}_4 &- 10\text{T/day} \\ &- 834 \text{ lb/hr} \\ &- 13.9 \text{ lb/min} \end{aligned}$$

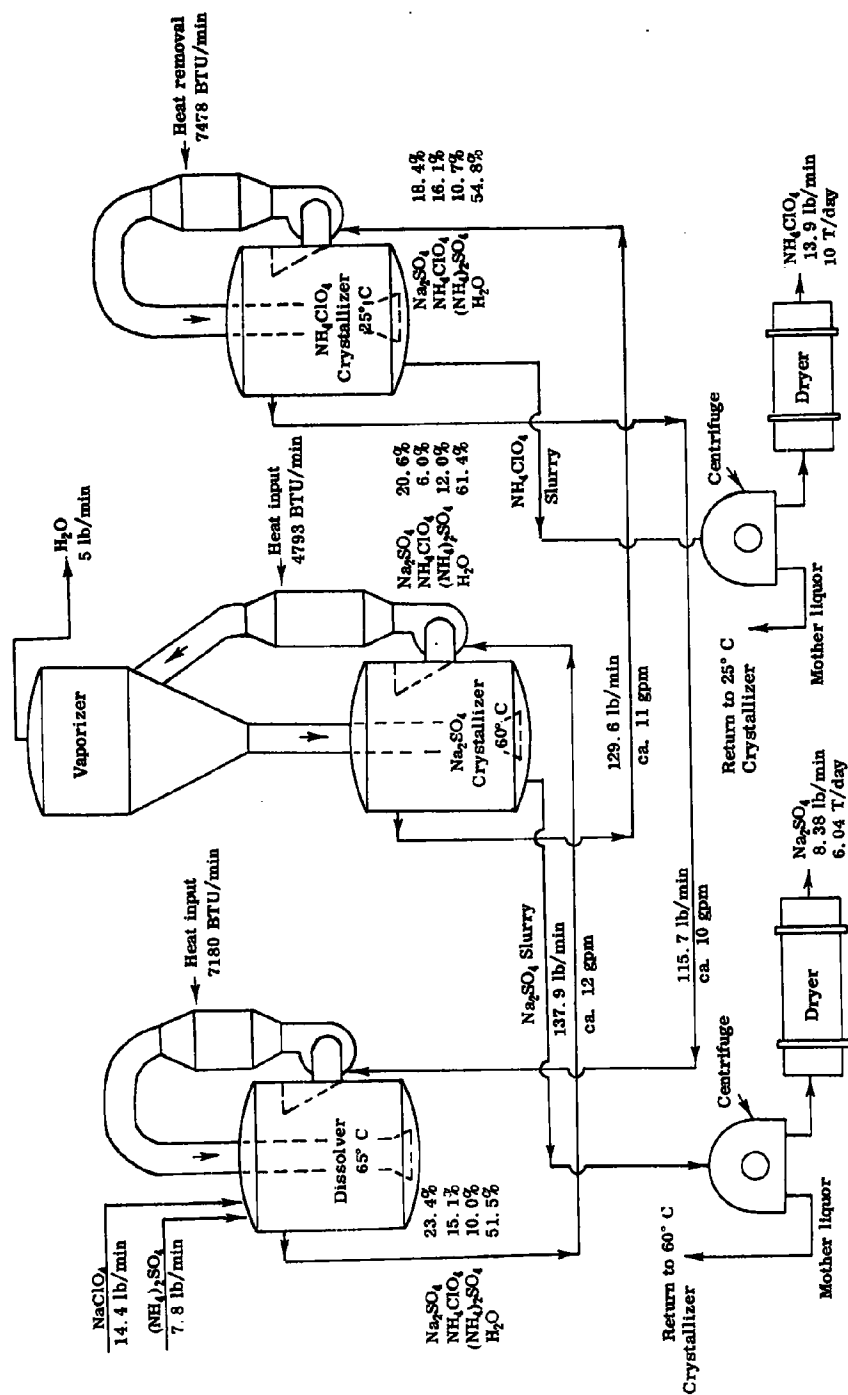


FIGURE 1. FLOW CHART FOR THE PRODUCTION OF AMMONIUM PERCHLORATE (10 T/DAY)

TMR 190

Na_2SO_4 → 6.04 T/day
 → 503 lb/hr
 → 8.38 lb/min

$(\text{NH}_4)_2\text{SO}_4$ → 5.62 T/day
 → 468 lb/hr
 → 7.8 lb/min

NaClO_4 → 10.42 T/day
 → 868 lb/hr
 → 14.4 lb/min

The flow rates were determined from the solution compositions to provide a production rate of 10 T/day ammonium perchlorate.

$(\text{NH}_4)_2\text{SO}_4$	to dissolver	7.8 lb/min at STP
NaClO_4	to dissolver	14.4 lb/min at STP
Mother liquor	to dissolver	115.7 lb/min at 25° C
Solution	to Na_2SO_4 crystallizer	137.9 lb/min at 65° C
Solution	to NH_4ClO_4 crystallizer	129.6 lb/min at 60° C
Na_2SO_4	produced	8.38 lb/min
NH_4ClO_4	produced	13.9 lb/min


Heat Balance

The heat balance for this process was accomplished by taking each unit in this closed system and analyzing the heat involved. Assumptions were made as to the specific heat of the solutions, radiation and convection losses, and heat required to evaporate water introduced as centrifuge wash.

Dissolver:

The heat balance on the dissolver is based on taking 115.7 lb/min of mother liquor at 25° C and heating to 65° C and concurrently dissolving 7.8 lb/min of ammonium sulfate and 14.4 lb/min of sodium perchlorate. The resulting solution of 137.9 lb/min at 65° C is sent to the sodium sulfate crystallizer.

Heat of Reaction: The standard heat of reaction at 25° C was calculated for the following reaction:



$$(\text{NH}_4)_2\text{SO}_4(\text{c})\Delta H = -Q_f = -13,500 \text{ CHU (7.8 lb)}$$

$$2\text{NaClO}_4(\text{c})\Delta H = -Q_f = -24,600 \text{ CHU (14.4 lb)}$$

$$2\text{NH}_4\text{ClO}_4(\text{solu})\Delta H = -Q_f = -18,500 \text{ CHU (13.9 lb)}$$

$$\text{Na}_2\text{SO}_4(\text{solu})\Delta H = -Q_f = -19,800 \text{ CHU (8.4 lb)}$$

$$-13,500 - 24,600 = -18,500 - 19,800 + Q_R$$

$$Q_R = 200 \text{ CHU}$$

$$\text{Heat of reaction} = 360 \text{ BTU/min}$$

Sensible Heat: Heat required to raise temperature of solution, including reactant, from 77° F to 149° F ($\Delta t = 72^\circ \text{ F}$).

$$Q_S = WC_p\Delta t$$

$$Q_S = 137.9 \text{ lb/min} \times 0.75 \times 72^\circ \text{ F}$$

$$Q_S = 7447 \text{ BTU/min}$$

Heat Loss: In order to estimate the heat loss it is necessary to establish the approximate size of the dissolver. Sodium sulfate has an inverted solubility. In order to prevent salting out on the heater surface, the maximum temperature rise should not be more than 1°-3° F. This would require a circulating system of about 600-700 gpm with the dissolver holding about 2000 gal. With about 250 sq ft of surface and 2 in. of insulation, the heat loss is estimated.

$$R = \frac{X}{KA} = \frac{2/12}{0.0418 \times 250} = 0.016$$

$$Q_1 = \frac{\Delta t}{R} = \frac{90}{0.016} = 5625 \text{ BTU/hr}$$

$$= 93 \text{ BTU/min}$$

Heat Requirements (dissolver):

$$Q = Q_R + Q_S + Q_1$$

$$Q = 360 - 7447 - 93$$

$$Q = -7180 \text{ BTU/min}$$

$$= -430,800 \text{ BTU/hr}$$

Sodium Sulfate Crystallizer:

The heat balance on this crystallizer is based on introducing 137.9 lb/min of solution at 65° C, supersaturating the solution by

TMR 190

vacuum evaporation and cooling the solution to 60° C. Sodium sulfate will be crystallized at the rate of 8.38 lb/min. The overflow of the crystallizer, 129.6 lb/min at 60° C, passes to the ammonium perchlorate crystallizer. In addition to the heat of crystallization and sensible heat in the feed solution, the heat losses of radiation and convection and heat required to evaporate excess process water are considered.

Heat of Crystallization:

$$Q_c = H_c \frac{W}{M} = -358 \frac{8.38}{142.05}$$

$$Q_c = -21 \text{ CHU}$$

$$Q_c = -38 \text{ BTU/min}$$

Sensible Heat:

$$\begin{aligned} Q_s &= C_p W \Delta t \\ &= 0.75 \times 137.9 \text{ lb/min} \times 5 \times 1.8 \\ &= 931 \text{ BTU/min} \end{aligned}$$

Heat Loss: is assumed to be twice as large as it is in the dissolver since vapor body and suspension container are involved.

$$Q_1 = 186 \text{ BTU/min}$$

Process Water Evaporation: It is assumed that about 5 lb/min of water will be required to be evaporated. This amount will be introduced through centrifuge washer and pump seals.

$$Q_e = H_w = 1100 \times 5$$

$$Q_e = 5,500 \text{ BTU/min}$$

Heat Requirements: (Na₂SO₄ Crystallizer)

$$Q = Q_c + Q_s + Q_1 + Q_e$$

$$Q = -38 + 931 - 186 - 5500$$

$$Q = -4793 \text{ BTU/min}$$

Ammonium Perchlorate Crystallizer:

The heat requirements for this crystallizer are based on taking 129.6 lb/min of liquor at 60° C, cooling this liquor in the crystallizer

to 25° C, and crystallizing ammonium perchlorate. The balance of 115.7 lb/min of mother liquor at 25° C will be returned to the dissolver.

Heat of Crystallization:

$$Q_c = H_c \frac{W}{M} = 6360 \times \frac{13.9}{117.5}$$

$$Q_c = 752 \text{ CHU}$$

$$Q_c = 1354 \text{ BTU/min}$$

Sensible Heat:

$$\begin{aligned} Q_s &= C_p W \Delta T \\ &= 0.75 \times 129.6 \times 35 \times 1.8 \\ &= 6124 \text{ BTU/min} \end{aligned}$$

Heat Loss: Heat loss at 25° C is negligible.

Total Heat:

$$Q = Q_c + Q_s$$

$$Q = 1354 + 6124$$

$$Q = 7478 \text{ BTU/min}$$

ADVANTAGES

The process proposed here will simplify the selection of materials of construction and the maintenance of equipment. Rubber-lined tanks for hydrochloric acid, pressure storage tanks for ammonia, and high-vacuum equipment for ammonium perchlorate crystallization will not be necessary. The glass-lined reactor required for addition of ammonia and hydrochloric acid will also not be necessary.

With the proposed process, a standard 304 or 316 stainless steel should be adequate. From the standpoint of economic considerations and plant layout, further refinements in the process might be made. The water used to dissolve the sodium perchlorate for transport to the processing area might be eliminated; the mother liquor might be substituted for the water but this has some disadvantages.

MANUFACTURING COSTS

The purpose of this section is to discuss the cost of ammonium perchlorate. By analysis of the market costs of various chemicals used in the existing, proposed, and related processes, the expected manufacturing costs have been determined.


Basic Cost:

These data are based on prices taken from Hi-Lo Chemical Price Issue of the Oil, Paint, and Drug Reporter.

<u>Chemical</u>	<u>Price/lb</u>	<u>Price/ton</u>
Sodium chlorate	\$0.09	
Potassium chlorate	0.1125	
Potassium chloride	0.014	\$28
Sodium chloride	0.005	10
Potassium perchlorate	0.1850	
Ammonia	0.036	72
Muriatic acid (20° Be)	0.015	30
Sodium sulfate	0.026	52
Ammonium sulfate	0.021	42

Processing Cost:

The object of this part is to determine the processing cost for converting a salt by double decomposition reaction accompanied by crystallization. The following reaction was selected as typical of this type of process:




Processing cost is determined by subtracting the credit for sodium chloride produced from the ingredient cost and, in turn, subtracting this ingredient cost figure from the cost of the product.

$$\begin{array}{rcl}
 \text{NaClO}_3 & = 0.87 \times .09 & = 0.0783 \\
 \text{KCl} & = 0.61 \times .014 & = \underline{0.0085} \\
 & & 0.0868 \\
 \text{NaCl} & = 0.48 \times .005 & = \underline{0.0024} \\
 & & 0.0844 \\
 \text{KClO}_3 & = 1 \times .1125 & = 0.1125 \\
 & & - \underline{0.0844} \\
 \text{Processing Cost} & & 0.0281
 \end{array}$$

Therefore, the processing cost in this type of process is estimated to be about \$0.03 per pound of product.

Sodium Perchlorate:

This chemical is not an article of trade. No published price exists. It is necessary to estimate the cost for sodium perchlorate by using the following process:



By using the processing cost previously determined, the cost of sodium perchlorate is determined.

Processing cost	= 0.0300
KCl = 0.54 × .014	= 0.0076
	<u>0.0376</u>
Less NaCl credit (0.42 × .005)	= 0.0021
Ingredient and process cost	<u>0.0355</u>
KClO ₄ = 1 × .1850	= 0.1850
Less ingredients and processing	= 0.0355
NaClO ₄ (0.89 lb)	<u>0.1495</u>
	= 0.1680/lb

Therefore, sodium perchlorate is estimated at a unit cost of \$0.1680 per pound. Considering that sodium chlorate costs \$0.09 per pound, the spread of about \$0.08 per pound of sodium perchlorate is adequate to allow converting sodium chlorate to sodium perchlorate.

Proposed Process:

The cost of ammonium perchlorate produced by the proposed process would be as follows:

0.56 lb	1.04 lb	→	0.60 lb	1 lb
(NH ₄) ₂ SO ₄	+ 2NaClO ₄		Na ₂ SO ₄	+ 2NH ₄ ClO ₄
(NH ₄) ₂ SO ₄	= 0.56 × 0.021		= 0.0118	
NaClO ₄	= 1.04 × 0.1680		= 0.1747	
Processing			= 0.0300	
			<u>0.2165</u>	
Less Na ₂ SO ₄ credit			<u>0.0159</u>	
NH ₄ ClO ₄ cost			<u>0.2006</u>	

TMR 190

Existing Process:

A comparable cost for manufacture of ammonium perchlorate by an existing process is shown as follows:

0.31 lb	0.14 lb	1.041 lb	0.5 lb	1 lb
HCl	+ NH ₃	+ NaClO ₄	→ NaCl	+ NH ₄ ClO ₄
HCl	= 0.31 × $\frac{1}{.3145}$ × 0.015 = .0148			
NH ₃	= 0.14 × .036 = .0054			
NaClO ₄	= 1.04 × .1680 = .1747			
Processing	= .0300			
	.2249			
Less NaCl credit	= .0025			
NH ₄ ClO ₄ cost	.2224			

TARGET PRICE

The proposed process is about \$0.022 per pound less expensive than the existing process. Therefore, the real target price for ammonium perchlorate is about \$0.20 per pound. This represents a potential saving to the government of \$0.14 to \$0.20 per pound based on the current price of \$0.34 to \$0.40 per pound. On the basis of 1,000,000 pounds per month, this amounts to an annual saving of from \$1,680,000 to \$2,400,000 per year. The cost involved in obtaining a specific particle size distribution has not been considered.

REFERENCE

- (1) F. A. Freeth. "Ternary and Quaternary Equilibria in the System: Sodium Perchlorate-Ammonium Sulfate-Ammonium Perchlorate-Sodium Sulfate-Water at 60° and 25°." *Rec. Trav. Chim.* Vol. 43:475-507 (1924).

DISTRIBUTION LIST

<u>Addressee</u>	<u>Copy no.</u>
Naval Propellant Plant (Archives copy)	1
Commander Army Ballistic Missile Agency Redstone Arsenal, Albama Attn: ORDAB-HSI	2
Commander U. S. Naval Weapons Laboratory Dahlgren, Virginia Attn: Technical Library	3
Commander U. S. Naval Ordnance Laboratory White Oak Silver Spring, Maryland Attn: Library	4-5
Director U. S. Naval Research Laboratory Washington 20, D. C. Attn: Chemistry Division, Code 6130 R. R. Miller	6
Bureau of Naval Weapons Department of the Navy Washington 25, D. C. Attn: RUSD-252	7
Commanding Officer Office of Naval Research 1030 E. Green Street Pasadena 1, California	8
Aerojet-General Corporation P. O. Box 296 Azusa, California Attn: Librarian	9

Hercules Powder Company Allegany Ballistics Laboratory P. O. Box 210 Cumberland, Maryland Attn: Library	10-11
Armour Research Foundation of Illinois Institute of Technology Technology Center Chicago 16, Illinois Attn: Propulsion and Structural Research; Dept M	12
Army Chemical Center Edgewood Arsenal, Maryland Attn: Eng. Documentation	13-14
Atlantic Research Corporation Shirley Highway and Edsall Road Alexandria, Virginia	15-16
The Franklin Institute 20th and Parkway Philadelphia 3, Pennsylvania Attn: Chemical Kinetics Branch W. E. Scott	17
Explosives Department Hercules Powder Company Delaware Trust Building Wilmington 99, Delaware Attn: A. M. Ball	18
Jet Propulsion Laboratory 4800 Oak Grove Drive Pasadena 3, California Attn: I. E. Newlan Chief, Reports Group	19
Rohm and Haas Company Redstone Arsenal Res. Div. Huntsville, Alabama Attn: Librarian	20

Solid Propellant Information Agency Applied Physics Laboratory The Johns Hopkins University Silver Spring, Maryland	21-23
Thiokol Chemical Corporation Redstone Division Huntsville, Alabama Attn: Technical Director	24-25
Olin Mathieson Chemical Corporation Marion, Illinois Attn: Research Library, Box 508	26-27
Rocketdyne, A Division of North American Aviation, Inc. Solid Propulsion Operations P. O. Box 548 McGregor, Texas Attn: Library	28
Commanding Officer Naval Ammunition Depot Crane, Indiana Attn: Code 34	29
Thiokol Chemical Corporation Elkton Division Elkton, Maryland Attn: Librarian	30
Reaction Motors Division Thiokol Chemical Corporation Denville, New Jersey Attn: Librarian	31
Rocketdyne, A Division of North American Aviation, Inc. 6633 Canoga Avenue Canoga Park, California Attn: Library Dept. 596-306	32-34
Aerojet-General Corporation Box 1168 Sacramento, California Attn: Miriam S. Nylin, Librarian	35-37

Thiokol Chemical Corporation Utah Division Brigham City, Utah Attn: Library Section	38-40
Olin Mathieson Chemical Corporation Research Library 1-K-3 275 Winchester Avenue New Haven, Connecticut Attn: Mail Control Room Miss Laura M. Kajuti	41
Shell Development Company 4560 Horton Street Emeryville 8, California	42
Hughes Tool Company Aircraft Division Culver City, California	43
U. S. Borax Research Corp. 412 Crescent Way Anaheim, California	44
Ethyl Corporation P. O. Box 3091, Istrouma Branch Baton Rouge, Louisiana	45
Peninsular Chemical Research Incorporated 1103-5 N. W. 5th Avenue P. O. Box 3597, University Station Gainesville, Florida	46
Ethyl Corporation Research Laboratories 1600 West Eight Mile Road Ferndale, Michigan Attn: E. B. Rifkin, Assistant Director, Chemical Research	47
The Dow Chemical Company Midland, Michigan Attn: Harold A. Robinson, Technical Director 644 Building	48

Minnesota Mining and Mfg. Co.
900 Bush Avenue
St. Paul 6, Minnesota
Attn: J.W. Millin
VIA: R.W. McElroy
Security Administrator

49

Esso Research and Engineering Co.
Chemicals Res. Div.
P. O. Box 51
Linden, New Jersey
Attn: Dr. J. P. Longwell
VIA: Chief, New York Ordnance District
U.S. Army
770 Broadway
New York 3, New York
Attn: Facilities and Resources Branch

50

American Cyanamid Company
1937 W. Main Street
Stamford, Connecticut
Attn: Dr. A. L. Peiker

51

Hercules Powder Company
Bacchus Works
Magna, Utah
Attn: Librarian

52

Monsanto Chemical Company
Special Projects Department
Everett, Massachusetts
Attn: Dr. Lucius Gilman

53

Allied Chemical Corporation
General Chemical Division
Research Laboratory
P. O. Box 405
Morristown, New Jersey
Attn: H. R. Neumark

54

Callery Chemical Company
Research and Development
Callery, Pennsylvania
Attn: Dr. L. J. Edwards

55

U. S. Department of Interior Bureau of Mines 4800 Forbes Street Pittsburgh 13, Pennsylvania Attn: Majorie P. Benoy, Reports Librarian Explosives Research Lab	56
National Aeronautics and Space Administration 1520 H. Street, N.W. Washington 25, D.C. Attn: Chief, Division of Research Information	57-63
Armed Services Explosive Safety Board Room 2075, T-7 Building Gravelly Point Washington 25, D.C. Attn: Technical Office	64
Commander Air Force Flight Test Center Edwards Air Force Base, California Attn: FTRS	65
Commander Aeronautical Research Laboratories Wright-Patterson Air Force Base Ohio Attn: RRLC	66
Commander Air Proving Ground Center Eglin Air Force Base Florida Attn: Technical Library	67
Commander Air Force Ballistic Missile Div. Hq. Air Res. and Dev. Command P.O. Box 262 Inglewood, California Attn: WDAT	68
Commander Wright Air Development Center Wright-Patterson Air Force Base Ohio Attn: WWRCNP	69

Commander Air Force Flight Test Center Edwards Air Force Base, California Attn: FTRP	70
Commanding General Aberdeen Proving Ground Maryland Attn: Ballistic Research Laboratories ORDBG-BLI	71-72
Commanding General USA Ordnance Arsenal, Frankford Philadelphia 37, Pennsylvania Attn: Propellant and Explosives Section, 1331	73
Commanding Officer Office of Ordnance Research Box CM Duke Station Durham, North Carolina	74
Commanding Officer Picatinny Arsenal Dover, New Jersey Attn: Library	75-76
Commander Army Rocket and Guided Missile Agency Redstone Arsenal Alabama Attn: Technical Library ORDXR-OTL	77-80
Commanding General Ordnance Ammunition Command Joliet, Illinois Attn: ORDLY-AREL, Eng. Library	81
Commanding Officer Diamond Ordnance Fuze Laboratories Washington 25, D. C. Attn: ORDTL (012)	82

The B. F. Goodrich Company Research Center Brecksville, Ohio Attn: Charles H. Stockman	83
Pennsalt Chemicals Corporation Box 4388 Philadelphia 18, Pennsylvania Attn: Dr. G. Barth-Wehrenlap	84-85
The Borden Chemical Company Godfrey Avenue and Langdon Street Philadelphia, Pennsylvania Attn: Dr. B. D. Halpern	86
Department of Defense Director of Defense Research and Engineering The Pentagon, Room 3E1006 (Mr. York) Room 3E1060 (Mr. Parker) Room 3E1022 (Mr. Townsend) Washington 25, D. C.	87-89
Department of Defense Assistant Secretary (Supply and Logistics) Director for Planning and Requirements Policy The Pentagon, Room 3E822 (Mr. Gibson) Washington 25, D. C.	90
Director Advanced Research Projects Agency The Pentagon, Room 3D154 Washington 25, D. C. Attn: Fred A. Koether Technical Information Office	91
Bermite Powder Company Saugus, California	92
Pennsalt Chemical Corporation Tacoma, Washington Attn: Mr. P. C. Staples	93
Bureau of Naval Weapons Representative c/o Aerojet-General Corporation Azusa, California	94-95

Bureau of Naval Weapons Resident Representative Sacramento, California	96-97
Southwest Research Institute Department of Chemistry and Chemical Engineering 8500 Culebra Road San Antonio 6, Texas Attn: Dr. Herbert C. McKee	98
Naval Ammunition Depot Crane, Indiana	99
Wyandotte Chemical Corporation Wyandotte, Michigan Attn: R. A. Graham Department of Contract Research Research and Development Division	100
B. F. Goodrich Aviation Products P. O. Box 395 Rialto, California Attn: Mr. A. B. Japs Manager, Rocket Motor Development	101
Standard Oil Company Research Department P. O. Box 431 Whiting, Indiana Attn: B. H. Shoemaker	102
Department of Chemical Engineering New York University New York 53, New York Attn: C. J. Marsel	103
Midwest Research Institute 425 Volker Boulevard Kansas City 10, Missouri Attn: Librarian	104
Arthur D. Little, Incorporated 15 Acorn Park Cambridge 40, Massachusetts Attn: W. A. Sawyer	105

Army Chemical Center Army Chemical Corporation Division of Engineering Documentation Attn: Mr. K. Mosely Mrs. Boyle Edgewood, Maryland	106-107
OASD, Fuels and Lubricants The Pentagon, Room 3E1030 (Mr. Sheehan) Washington 25, D.C.	108
Commander Armed Services Tech. Information Agency Arlington Hall Station Arlington 10, Virginia Attn: TIPCR	109-118
Holston Ordnance Works Kingsport, Tennessee	119
Jefferson Proving Ground Madison, Indiana	120
Department of the Army Office, Chief of Ordnance Washington 25, D.C. Attn: ORDTB	121
Commanding Officer Radford Arsenal Radford, Virginia	122
Commanding Officer Sunflower Ordnance Works Lawrence, Kansas	123
Commanding General White Sands Missile Range New Mexico Attn: ORDBS-OM-TL	124
Grand Central Rocket Company P. O. Box 111 Redlands, California Attn: Helen Ashman, Librarian	125

Phillips Petroleum Company Bartlesville, Oklahoma	126
American Potash and Chemical Corporation Henderson, Nevada	127-128
Hooker Electro Chemical Company Niagara Falls, New York	129
Foote Mineral Company Philadelphia 44, Pennsylvania	130
HEF Incorporated 18 West Chelton Avenue Philadelphia 44, Pennsylvania Attn: Mr. W. Weltzel	131-132
Bureau of Naval Weapons Department of the Navy Washington 25, D. C. Attn: RMMP-331	133
DLI-3	134-135
CS	136
SP-27	137-138
ROIR-233	139
ROIR-222	140-141
FWAA-53	142
FQQA-3	143
RRMA-221	144
RUUO-11	145-146
N-11	147
RMMO-3	148
RMMP-33	149-151
RMMP-2	152
Bureau of Naval Weapons Department of the Navy Washington 25, D. C. Attn: A. D. Wilroy, Jr. NPP Representative Room 3126	153

Quality Assurance Department, NPP	154-156
Production Department, NPP	157-172
Polaris Project Management Office, NPP	173-183
Research and Development Department Personnel	184-196
Naval Propellant Plant Files	197-201

Naval Propellant Plant, Indian Head, Maryland (TMR 190) DESIGN STUDY FOR AN ALTERNATE METHOD FOR PRODUCTION OF AMMONIUM PERCHLORATE(U). By J. E. Dodgen. 17 July 1961. 11 p. UNCLASSIFIED Preparation of ammonium perchlorate by double decomposition of ammonium sulfate and sodium perchlorate was used to determine a target price for economic production.	1. Ammonium perchlorate - Production I. Dodgen, J. E.	Naval Propellant Plant, Indian Head, Maryland (TMR 190) DESIGN STUDY FOR AN ALTERNATE METHOD FOR PRODUCTION OF AMMONIUM PERCHLORATE(U). By J. E. Dodgen. 17 July 1961. 11 p. UNCLASSIFIED Preparation of ammonium perchlorate by double decomposition of ammonium sulfate and sodium perchlorate was used to determine a target price for economic production.	1. Ammonium perchlorate - Production I. Dodgen, J. E.
Naval Propellant Plant, Indian Head, Maryland (TMR 190) DESIGN STUDY FOR AN ALTERNATE METHOD FOR PRODUCTION OF AMMONIUM PERCHLORATE(U). By J. E. Dodgen. 17 July 1961. 11 p. UNCLASSIFIED Preparation of ammonium perchlorate by double decomposition of ammonium sulfate and sodium perchlorate was used to determine a target price for economic production.	1. Ammonium perchlorate - Production I. Dodgen, J. E.	Naval Propellant Plant, Indian Head, Maryland (TMR 190) DESIGN STUDY FOR AN ALTERNATE METHOD FOR PRODUCTION OF AMMONIUM PERCHLORATE(U). By J. E. Dodgen. 17 July 1961. 11 p. UNCLASSIFIED Preparation of ammonium perchlorate by double decomposition of ammonium sulfate and sodium perchlorate was used to determine a target price for economic production.	1. Ammonium perchlorate - Production I. Dodgen, J. E.

UNCLASSIFIED

UNCLASSIFIED